Rear Mud Guard for Honda Pioneer 700

ZP-YJ-030910-013



BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted. Please retain these installation instructions for future reference.

This *rear mud guard* is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.


PRODUCT





- 1. Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.
- 2. Assemble the split mud guard into complete units using the included screws and nuts. As shown in the figure.







3. Open the rear cargo gate, first place the single-piece mudguard against the side of the vehicle's step plate. Then prepare a 6mm drill bit and drill holes in the vehicle according to the fixed hole positions on the mudguard. After that, secure it using the provided screws and nuts. As shown in the figure:

Note: Due to limited space near the tire when drilling in the vehicle, you can first use a 3mm drill bit to create pilot holes for positioning, then switch to a 6mm drill bit from the front side to enlarge the holes. This will effectively prevent misalignment of the hole positions.


Rear Mud Guard for Honda Pioneer 700

ZP-YJ-030910-013







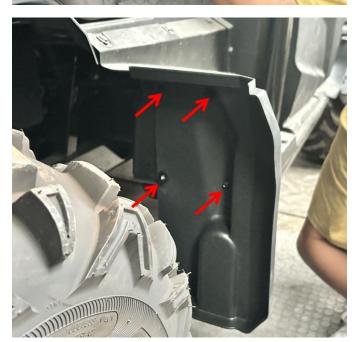

4. Attach the other assembled mudguard to the iron bracket of the vehicle accordingly. Then,

use a 6mm drill bit to drill holes in the vehicle according to the fixed holes on the mudguard. After that, fix it with the matching screws and nuts, and finally reinforce it with self-tapping screws. (The other side can be assembled and installed in the above way in sequence.) As shown in the figure:







Rear Mud Guard for Honda Pioneer 700

ZP-YJ-030910-013





5. The installation is complete.



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.