

Front Bumper for Yamaha RMAX 1000



ZP-YJ-031006-010

BEFORE YOU BEGIN


Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

The front bumper is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

Product and accessories picture:

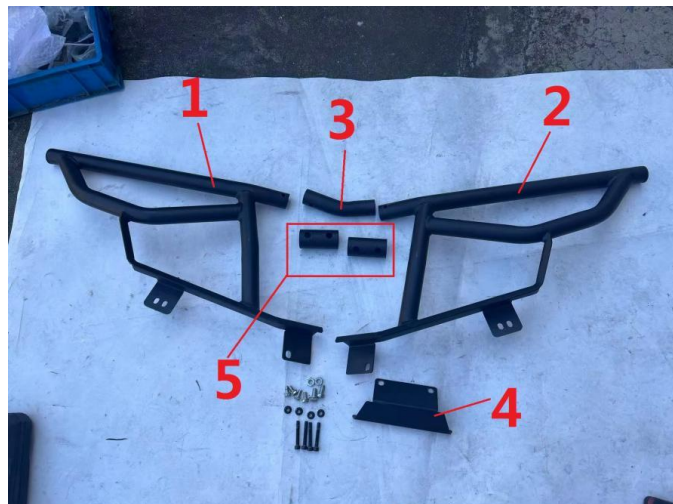

1. Assemble components 1, 2, and 3 using two sleeve components 5, secured with four M8 x 50 hexagon socket screws and M8 lock nuts. As shown in the picture:



2. Remove the four bolts securing the front

lower bumper and set them aside. As shown in the picture:



Front Bumper for Yamaha RMAX 1000



ZP-YJ-031006-010



3. Using two M10 x 20 hexagon socket head cap screws and two M10 lock nuts, assemble the removed front lower bumper and upper bumper via mounting bracket 4. As shown in the picture:



4. Assemble the front upper bumper to the front lower bumper at both ends using four M8 x 16 hexagon socket head cap screws. As shown in the picture:



5. Using the four screws removed from the original vehicle's front lower bumper, fit the complete front bumper to the frame. Tighten the screws to complete the installation.



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.