

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

The Speaker Pod is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK".

Turn key to "OFF" position and remove from vehicle.


Product and accessories picture:

Note: 1. Support 6.5" speakers

2. Speakers are not included in this product and need to be purchased by yourself.



1. First, install the speaker you have prepared into the speaker mount using self-tapping screws to secure it. As shown in picture:

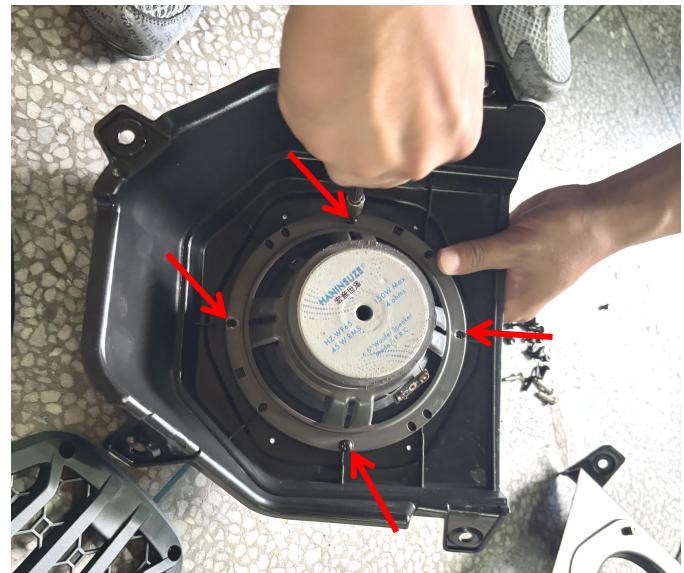


2. Prepare a white marker and a 5.2mm drill bit. First, position the speaker bracket beneath the original dashboard in the corresponding location. Then use the marker to mark the two mounting holes beneath the bracket. After removing the speaker bracket, use the drill bit to drill holes at the marked locations. As shown in picture:



Under Dash Speaker Pods for Kawasaki Teryx


ZP-YJ-031003-020

SAUTVS®

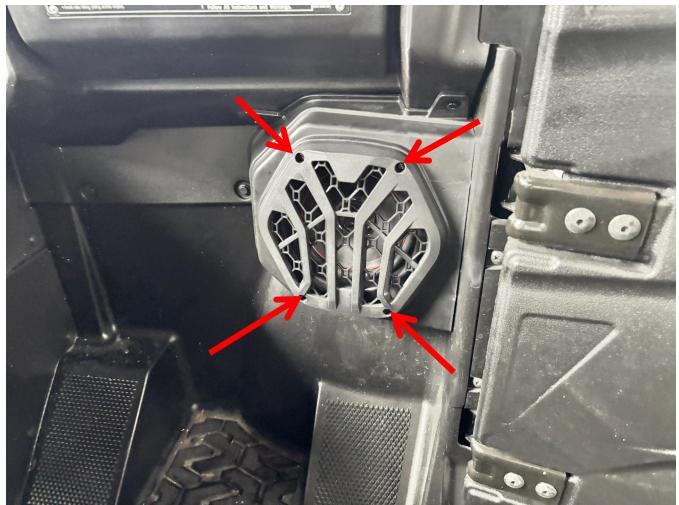

3. Reinstall the speaker bracket onto the original vehicle using the screws, nuts, and self-tapping screws provided with the product. Finally, secure the decorative outer frame of the speaker bracket. (Repeat the same steps for the other side.) As shown in picture:

Note: The two drilled locations are secured using screws and nuts, while the two mounting points on the bracket are installed using self-tapping screws.

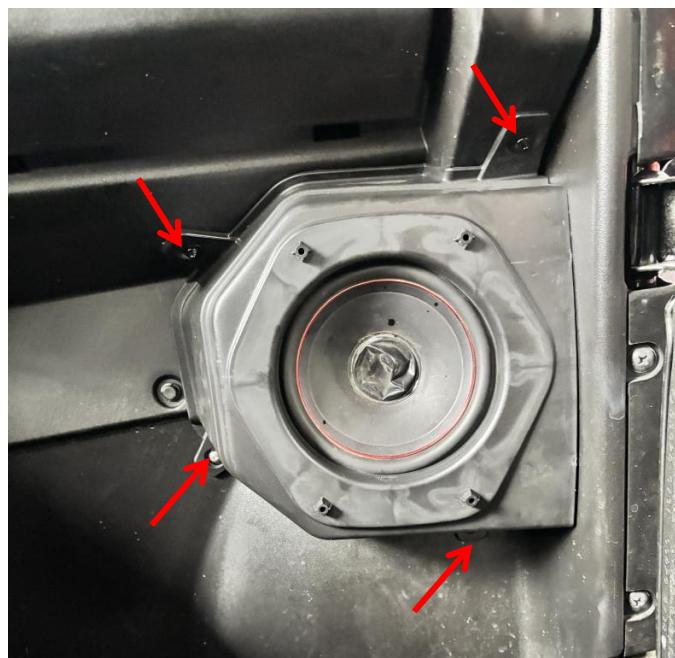

4. Installation completed!



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.