

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

These Side Mirrors are exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK".

Turn key to "OFF" position and remove from vehicle.

Product and accessories picture:



1. First, cut the sponge strip in the accessory package to the appropriate length (you can measure the sponge strip along the inner ring of the side mirror bracket to determine how long it needs to be cut), and then stick the cut sponge strip on the circular inner side of the installation bracket (sponge strips need to be attached to both the upper and lower circular inner sides). As shown in picture:




2. Insert the installation bracket with the sponge strip attached onto the original A-pillar of the vehicle (the height can be chosen independently), and then use the matching screws, lining tubes, flat washers, and nuts to fix it. As shown in picture:

Side Mirrors for Kawasaki Mule SX

ZP-YJ-031005-022

SAUTVS

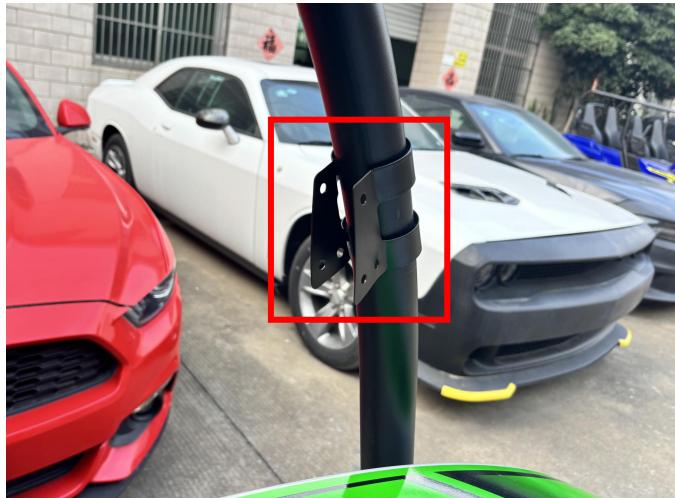

3. Finally, install the side mirror on the bracket using matching screws, lining tubes, flat washers, and nuts for fixation (the other side can be installed in the same way as above). As shown in picture:



4. Installation completed!



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.