

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

The *Front Fascia* is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS


Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

Product picture



1. First assemble the front fascia into a complete unit. As shown in the picture:

Note: Use M4x12 self-tapping screws and M5x20 screws when assembling the front fascia.

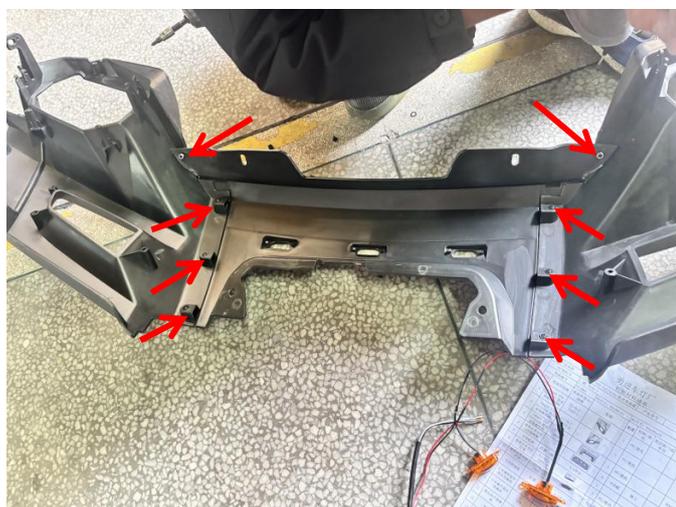


2. Open the original hood, remove the original front fascia, and disconnect the original

headlight wiring harness connectors. As shown in the picture:






3. Remove the original headlights and springs, then transfer and install them onto the new front fascia in the same manner. As shown in the picture:

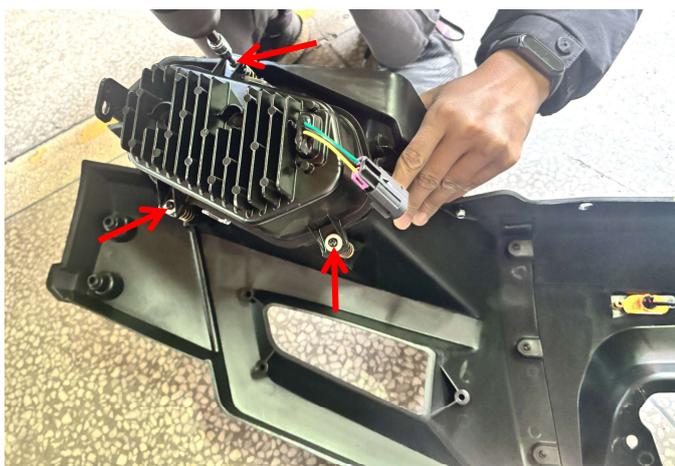

4. Reinstall the front fascia and hood onto the original vehicle, securing them with the original screws. (For non-light front fascia, please skip

the following step) Then, prepare the matching adapter harness—connect one end to the original vehicle's ACC terminal and the other end to the front fascia's decorative light wiring. After completion, turn the original ignition key to check if the small decorative lights illuminate properly. Once confirmed, close the hood securely. As shown in the picture:

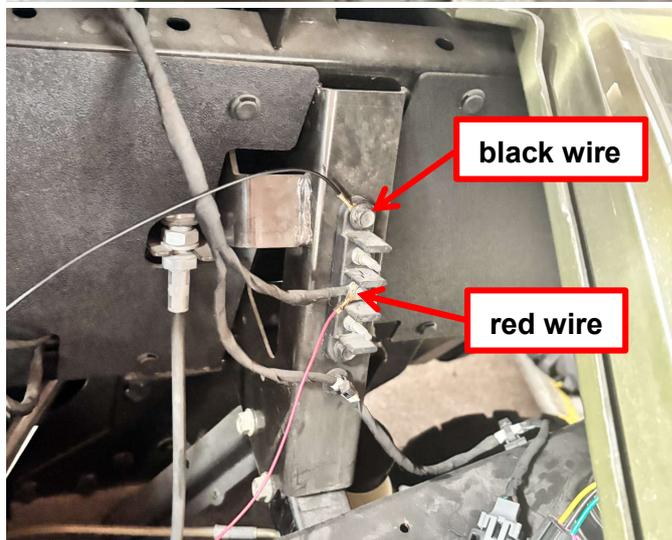

5. Installation is complete.

Front Fascia for Polaris Ranger 570 Fullsize



Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.