

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

These Daytime Running Lights are exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.


INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.

Product and accessories picture:




1. Press and hold the switch on the top of the vehicle's hood to open it, as shown in the figure:

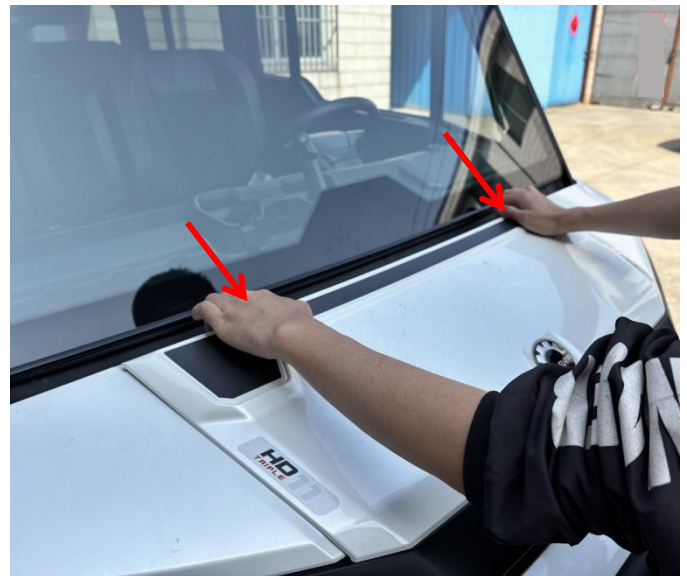



2. Use tools to pry off the snap fasteners that secure the decorative panel, and remove the decorative panel (the other side of the decorative panel should be removed in the same way). As shown in the figure:

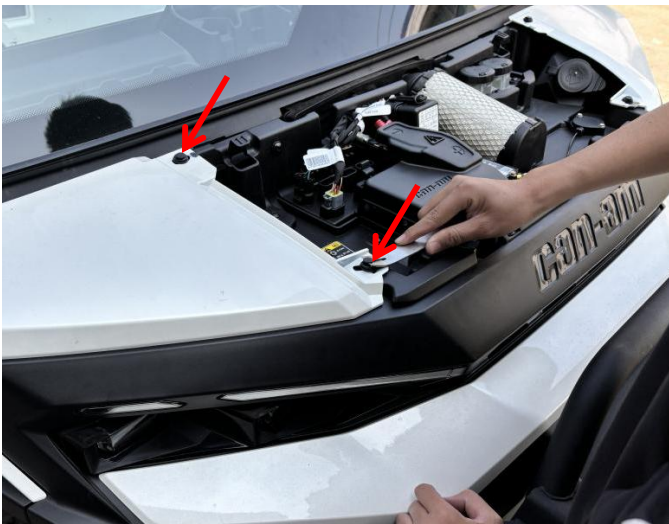


3. Remove the original front bumper and grille (the original grille has no mounting screws; simply grasp the areas marked with arrows and pull outward to remove it). As shown in the figure:

Note: When removing the metal bumper, at least two people must work together to prevent accidents.






and the reservoir before pulling it out). Next, remove the engine compartment bracket. As shown in the figure:

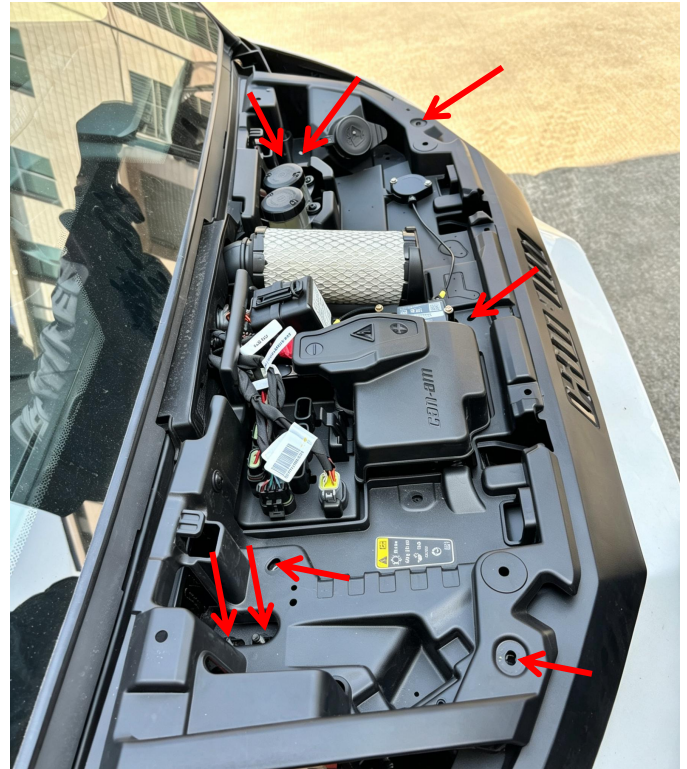


4. Remove the original air filter and the windshield washer inlet pipe (the air filter can be detached by pulling it directly out from the base, while the washer inlet pipe requires first loosening the cable tie at the connection between the pipe

YAP-030602-074



and finally remove the original daytime running lights. As shown in the figure:

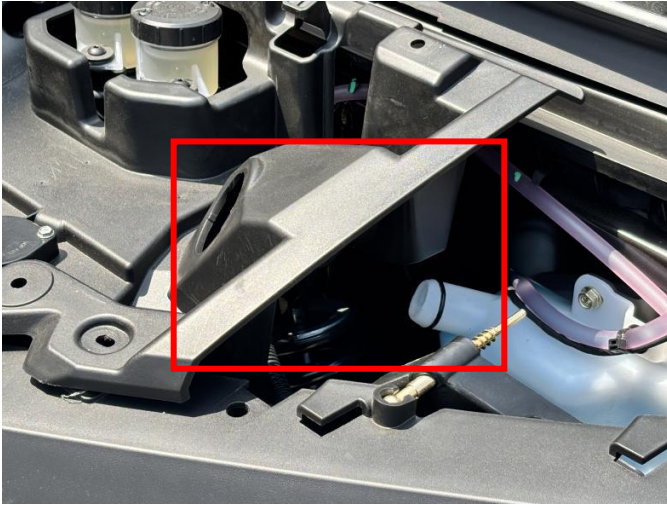

5. Remove the screws securing the original front fascia (there is no need to completely detach the front fascia from the vehicle; simply pry it loose enough to create space for removing the daytime running lights later). Next, remove the original headlights and their plastic mounting brackets, disconnect the headlight wiring harness connector,

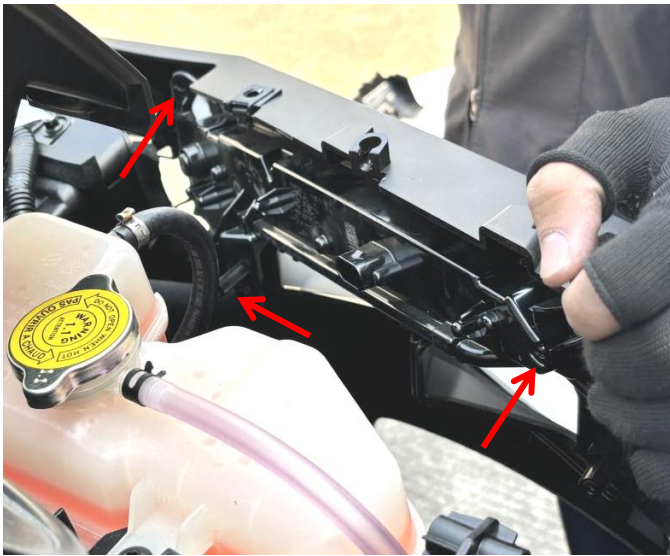

needed (using the yellow wire on the adapter cable).

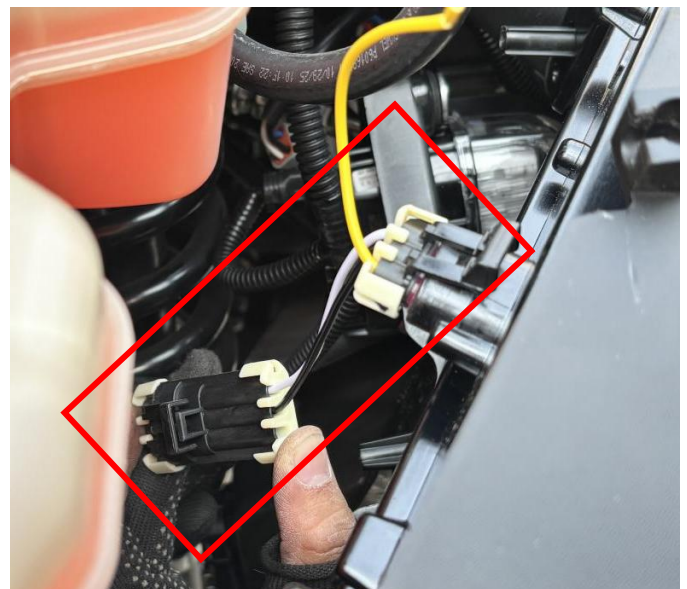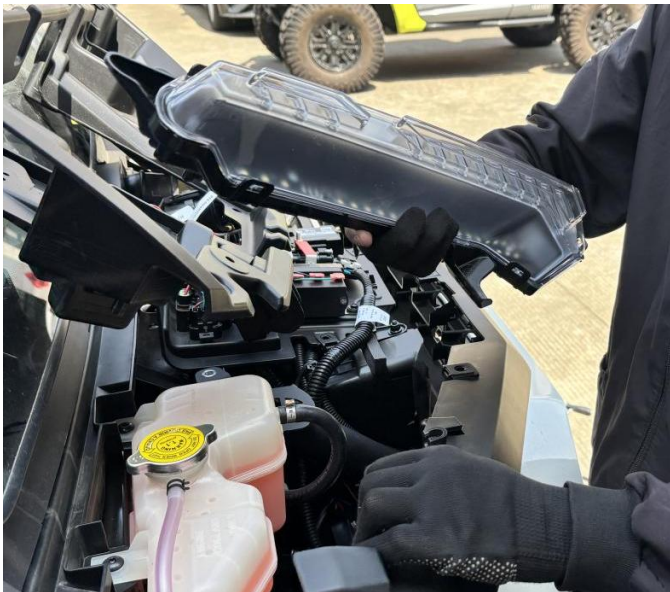

6. Prepare the new daytime running lights. Connect the included adapter cable to the new lights, then reinstall them in their original positions on the vehicle, securing them with the original screws. Reconnect the adapter cable to the vehicle's wiring harness connector (replace and install the other daytime running light in the same manner). Turn the ignition key to test whether the new daytime running lights are functioning properly. Once confirmed, reinstall the previously removed headlights and other accessories one by one, and the front bumper back into their original positions following the disassembly procedure. As shown in the figure:

Note: The new daytime running lights come with a turn signal function; you can connect them as



Daytime Running Lights for Can Am Defender HD11 **SAUTV5**

YAP-030602-074

7. Installation completed!

