

Front Bumper for Yamaha Drive2 G29 Golf Cart

ZP-YJ-041106-003

SAUTVS®

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted. Please retain these installation instructions for future reference.

This *front bumper* is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.

PRODUCT



front bumper to Part 4 using four M8x45 hex socket head screws and four M8 lock nuts, as shown:



INSTALLATION INSTRUCTIONS

1. Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.
2. Secure the upper section of the front bumper by fastening Part 1 and Part 3 with two tubes (Part 2), using four M8x45 hex socket head screws and four M8 lock nuts, as shown:



4. Install the mesh (Part 5) onto the front bumper using four M5x16 hex socket head screws, four M5 lock nuts, and four M5 washers. As shown:

3. Install the assembled upper section of the

Front Bumper for Yamaha Drive2 G29 Golf Cart

ZP-YJ-041106-003


SAUTVS®



5. Remove the four screws from the original plastic front bumper and detach the bumper. As shown:



6. Remove the four screws and nuts at the front of the original chassis, and keep the middle screws and nuts as spares. As shown:

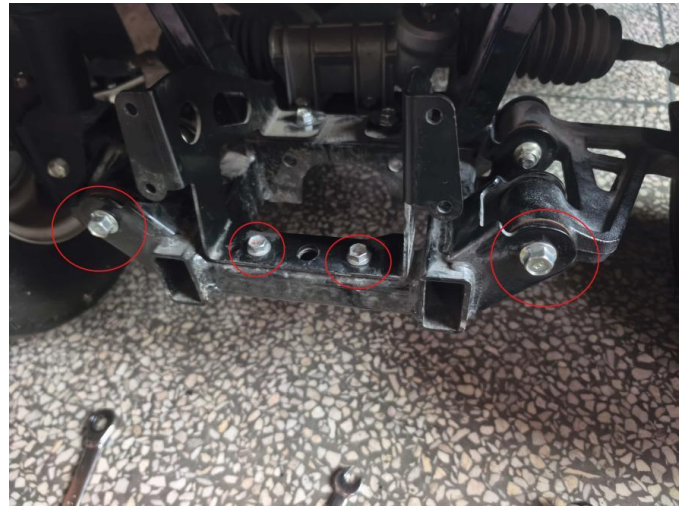

7. Install the front bumper onto the frame using the two screws and nuts just removed from the middle, as shown:



Front Bumper for Yamaha Drive2 G29 Golf Cart

ZP-YJ-041106-003

8. Secure the front bumper to the frame using two M10x90 flange hex bolts and two M10 lock nuts. Tighten all bolts and nuts to complete the installation. As shown:

