

Wiring Harness Retaining Bracket for E-Z-GO RXV VALOR

SAUTV5


BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted. Please retain these installation instructions for future reference.

This *Wiring Harness Retaining Bracket* is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris.

Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.


PRODUCT

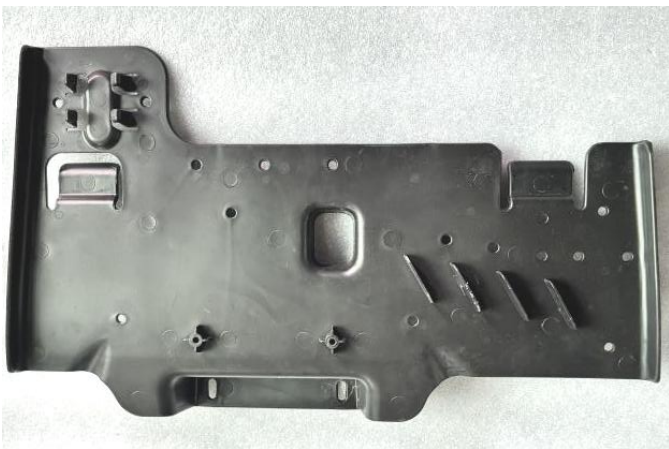


INSTALLATION INSTRUCTIONS

1. Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.
2. First remove the original vehicle dashboard (The windshield should also be removed). As shown:


Wiring Harness Retaining Bracket for E-Z-GO RXV VALOR

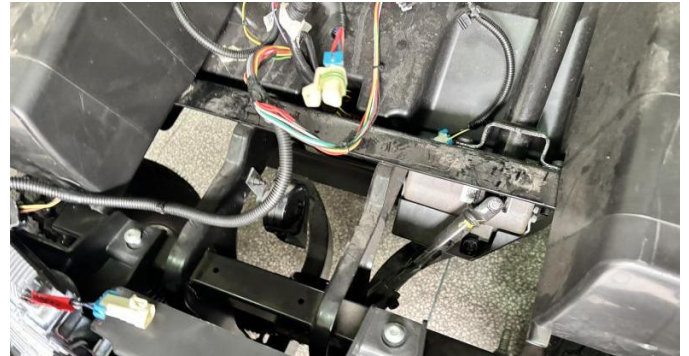


3. Remove the original hood. As shown:

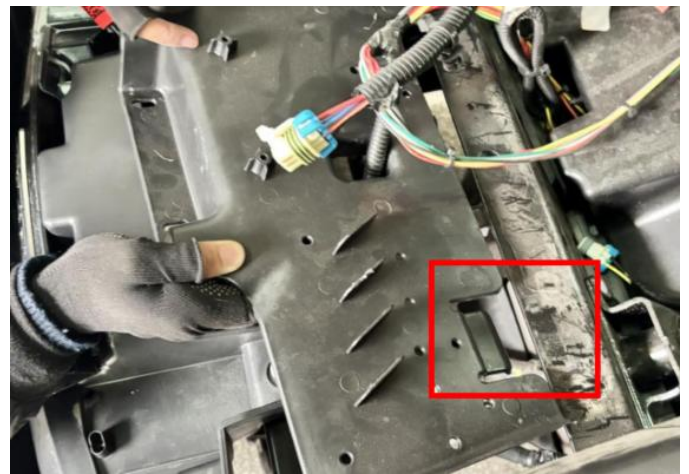

4. Remove the original wiring harness from the mounting bracket, then detach the original one and replace it with a new one. Secure it using the provided plastic clips. After installation, reattach the original wiring harness to the new bracket. Finally, reinstall the hood and dashboard to their original positions. As shown:

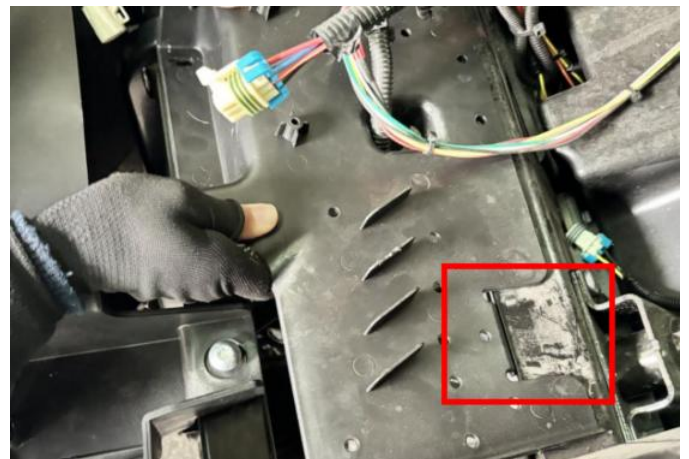

Wiring Harness Retaining Bracket for E-Z-GO RXV VALOR

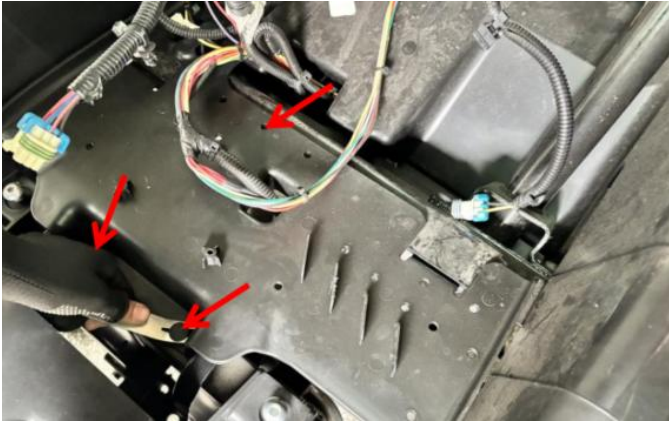

5. The installation is complete!

