

Auxiliary Lights for Polaris Ranger 1000 XP/Crew 2025+

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

The *Auxiliary Lights* are exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into "PARK". Turn key to "OFF" position and remove from vehicle.


Product and accessories picture:



No.	Item	Quantity
1	Auxiliary light L	1
2	Auxiliary light R	1
3	Decoration frame R	1
4	Decoration frame L	1
5	Adapter cable	1
6	U shape nut M6	6
7	Round head hexagon socket screw M6X20	6
8	Flat washer M6X14	6

1. Install the auxiliary lights on the front bumper:

Before installation, first remove the adapter cable. Insert the power end into the original headlight and the vehicle headlight wiring harness, and connect the other end to the auxiliary lights. Turn on the high beams to check if the lights function properly. First, secure the U-shaped nuts to the designated positions at both ends of the front bumper (refer to Figure A). Then, use M6X20 screws and flat washers to fix the auxiliary lights onto the front bumper (refer to Figures B and C).

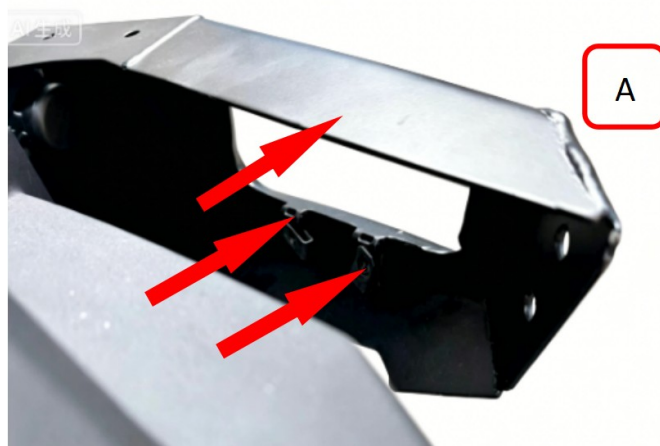

Auxiliary Lights for Polaris Ranger 1000 XP/Crew 2025+



2. Install the decorative trim on the front bumper:

First, remove the protective film from the double-sided adhesive on the back of the trim (refer to Figure D). Then, firmly press the trim onto the front bumper, ensuring the adhesive bonds while the clips on the trim securely snap into place (refer to Figures E and F).




3. Install the wiring harness:


Remove the engine cover, disconnect the connector behind the right headlight, and plug the two connectors of the wiring harness's power supply end into the corresponding headlight and vehicle headlight harness connectors (refer to the red box in Figure G). Remove the grille, route the wiring harness along the dashed line as shown in Figure H, and connect the harness plug to the auxiliary light (refer to Figure I). Note: The yellow wire is the turn signal power supply wire. To activate this function, an additional turn signal flasher controller is required (prepared by customer in advance).

Auxiliary Lights for Polaris Ranger 1000 XP/Crew 2025+

G

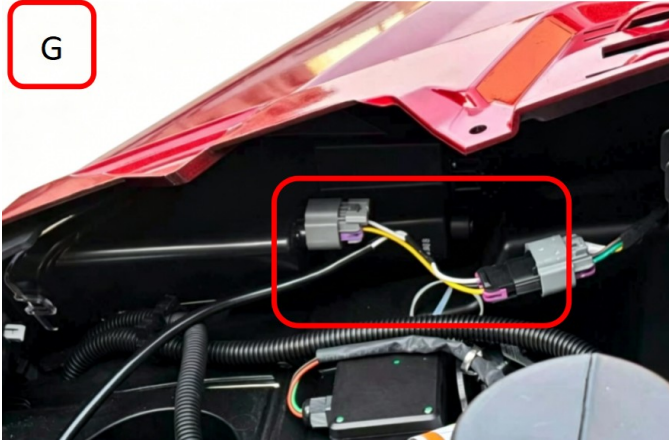

I

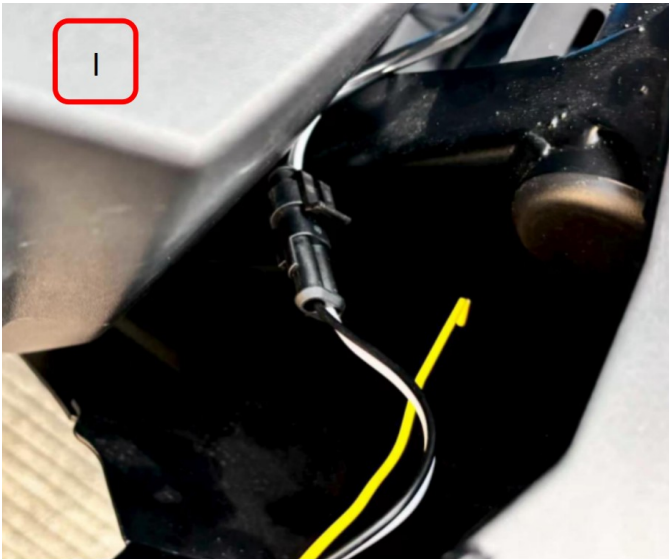

4. Installation complete!