

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT

The tail light is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.

INSTALLATION INSTRUCTIONS


Note: Shift vehicle transmission into “PARK”. Turn key to “OFF” position and remove from vehicle.

Product and accessories picture:


Product	Quantity (SX)	Quantity (4010)
Tail light	1	2



1. Remove the original taillight (see Figure A). Use a 10mm wrench to remove the two screws at the rear of the taillight, as shown in Figure B.


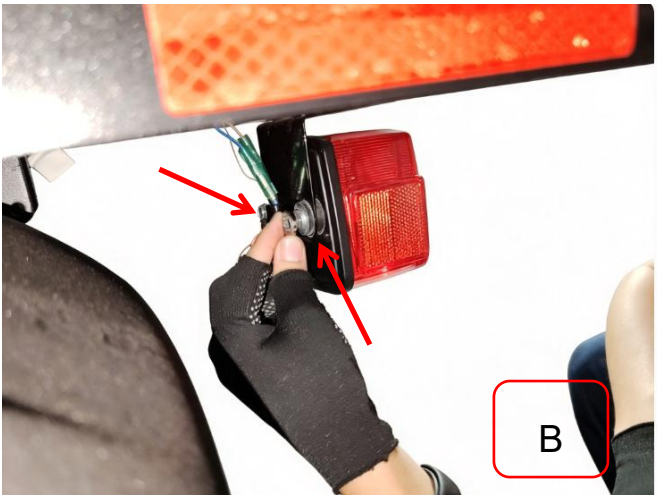


2. Remove the original taillights and unplug the original vehicle wiring harness, as shown in Figure C.

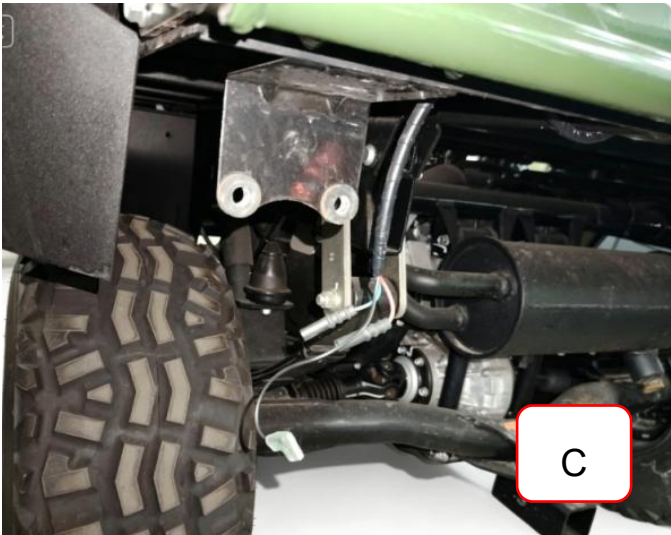

3. Connect the black wiring harness connector from the taillight to the existing black wiring harness connector on the vehicle. If the connector feels loose, use a pair of pliers to tighten the original vehicle’s black wiring harness connector (see Figure D). Reconnect

the connectors and insulate them with electrical tape (see the red box in Figure E); then connect the yellow wire from the taillight to the red wire from the vehicle; and connect the white wire from the taillight to the blue wire from the vehicle, as shown in Figure F.

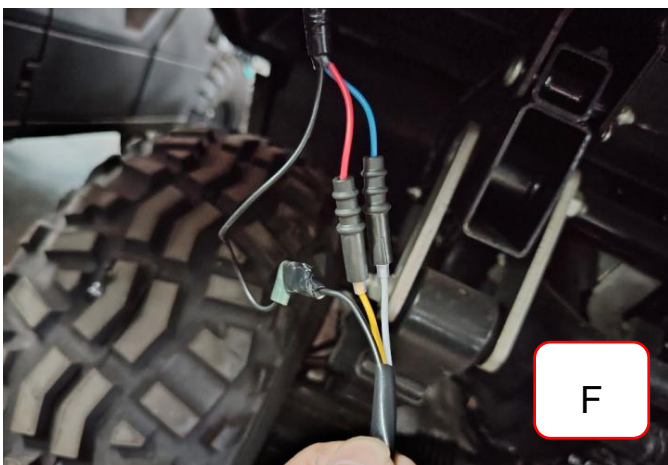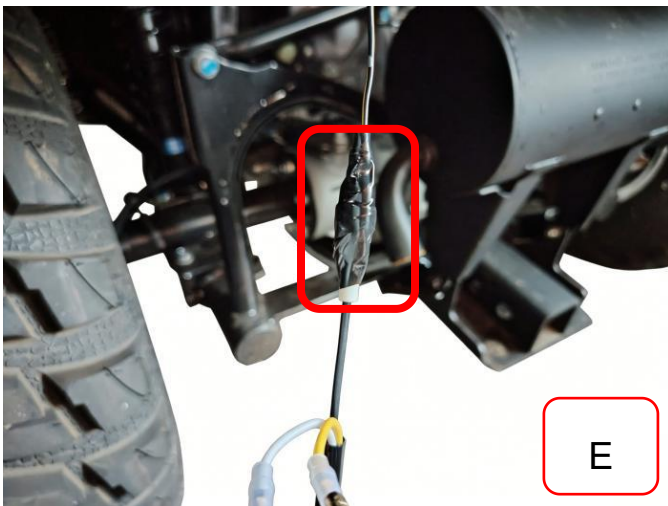

4. Reinstall the tail lights with the original vehicle screws (see Figure G), and the installation is complete.