

Front Mesh Grill with Accent Light (High-Low Beams) for Polaris Ranger XP 1000 2025

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference.

IMPORTANT


The *Mesh grill* is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

Note: Please refer to the installation video in the Amazon listing before your installation, or contact the seller for the installation video.

INSTALLATION INSTRUCTIONS

Note: Shift vehicle transmission into “PARK”. Turn key to “OFF” position and remove from vehicle.

Product and accessories picture:

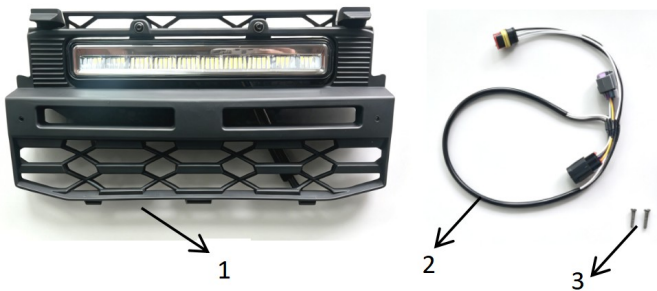

No.	Item	Quantity
1	Mesh Grill with Light	1
2	Adapter Cable	1
3	Self-tapping Screws 4*25	2

1. Turn the switch valves on both sides of the original vehicle hood to the unlocked position, then remove them as shown in Figure 1-2.







2. While pressing down the locking tabs on both sides above the original vehicle's grille, pull the grille outward to easily remove it, as shown in Figures 3-4.



Front Mesh Grill with Accent Light (High-Low Beams) for Polaris Ranger XP 1000 2025



3. Prepare the adapter harness that comes with the product. Disconnect the headlight wiring harness on the passenger side, connect it to the corresponding connector on the adapter harness, and then reconnect the other end of the adapter harness to the original vehicle's headlight, as shown in Figure 5. Next, route the extension wire from the adapter harness through the gap around the coolant reservoir cap to the front grille area (when passing the wiring through, first twist the coolant cap to a different direction, then twist it back to its original position after the wiring is through, as shown in Figures 6-7). Finally, connect it to the wiring connector on the grille light, as shown in Figure 8.

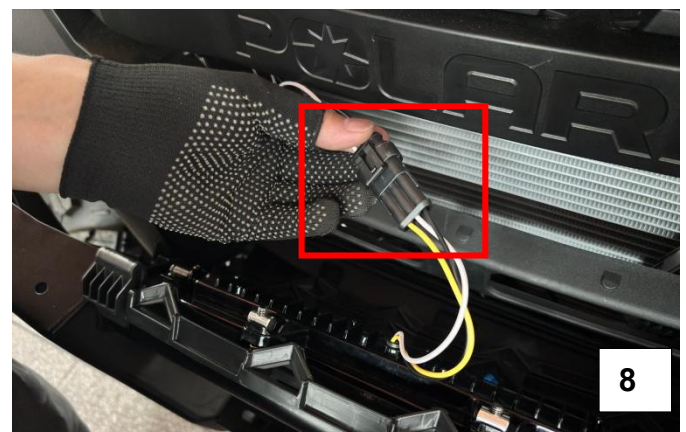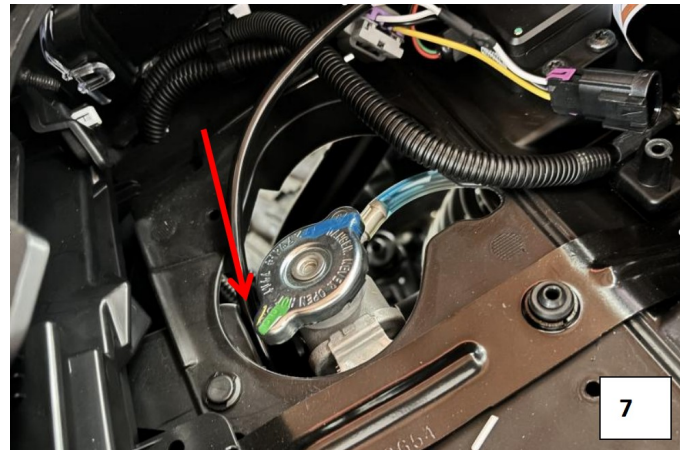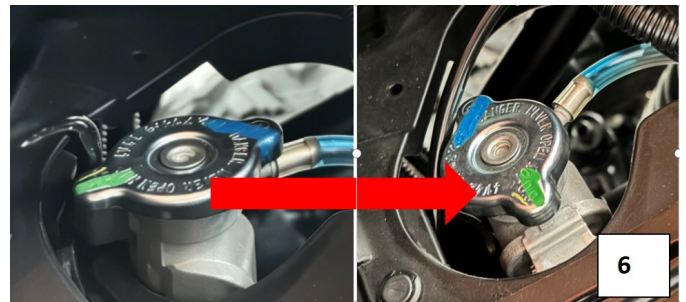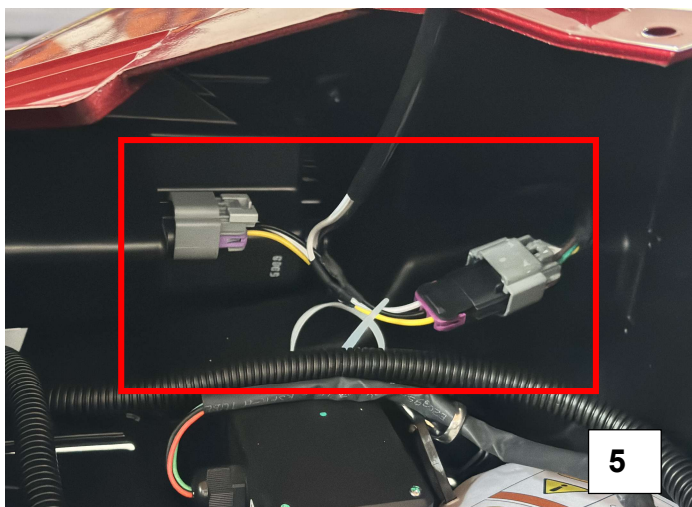

4. After connecting the new grille light wiring harness, turn on the original vehicle key and switch on the original headlights to check whether the new grille light is working properly and whether the high and low beams switch correctly, as shown in Figure 9. Once confirmed to be correct, install the grille back onto the original vehicle and use the provided self-tapping screws for additional reinforcement. Finally, reinstall the hood to its original position, as shown in Figures 10-11.

Front Mesh Grill with Accent Light (High-Low Beams) for Polaris Ranger XP 1000 2025



5. Installation complete!